

PRODUCT COMPOSITION

1 CORE

High density concrete of 34mm thickness
(1.250kg/m³ ±10% according to international standard)

2 TOP COVERING

Smooth steel sheet of 0,90mm finished with an epoxy coating.

3 COVERING


Porcelain of 10mm thickness, rectified and calibrated.

4 BOTTOM COVERING

Smooth steel sheet of 0,90mm thickness with 64 rounded embossments, electro-welded to the top covering steel sheet with an epoxy coating. Strengthened by a perimetral reinforced rib to obtain highest capacity.

DIMENSIONS

600 x 600 x 34 mm + top covering thickness.

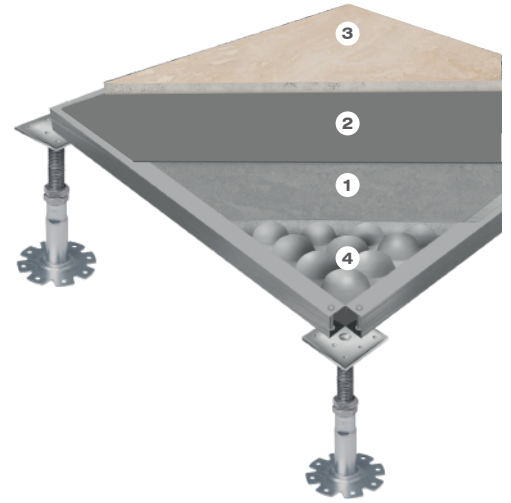

Ultimated load	kN	>12
Concentrated load Max. flexion 2,5mm	kN	4,50
Classification EN 12825		6A31

TECHNICAL DATA ACCORDING TO REGULATION EN 12825

General Characteristics

Distributed load	kN/m ²	41,00
Weight per panel	kg	22,60
Weight per sqm Structure included HF 300mm WS	kg	64,84 WITHOUT STRINGER 66,74 WITH STRINGER
Conductivity EN 1815	Kw	<2 antistatic physiologic
Electrical Resistance EN1081	Ω	>10 ⁹
Fire classification EN 13501-1:2002		A1
Inflammability EN ISO 11925-2:2002		No combustion or ignition
Flame spread EN ISO 9239-1:2002		Ø
Thermal Conductivity BSEN12825:2001		0,326 [w/(m·k)]

Regulation EN 12825

Position 1. Element class

	1	2	3	4	5	6
Last admitted load KN Aprox. kg	≥ 4 400	≥ 6 600	≥ 8 800	≥ 9 900	≥ 10 1000	≥ 12 1200

Position 2. Flexion class

A = 2,5 mm B = 3,0 mm C = 4,0 mm

Position 3. Safety class

2 / 3

Position 4. Squareness class

	Long side	Squad	Thickness
CLASS 1	± 0,2 mm	± 0,3 mm	± 0,3 mm
CLASS 2	± 0,4 mm	± 0,5 mm	± 0,5 mm



FEATURES



LEED CERTIFICATION

Using this floor system contributes positively with the LEED Building Rating Systems requirements in order to achieve LEED certifications.



SEISMIC SAFETY

This floor system has anti seismic characteristics, guaranteeing the safety of its installation. We can provide seismic study under the ASCE 7-10 regulation.



SOUND PROOFING

The system has acquired acoustic values that improves the reduction of impact noise as well as acoustic absorption.



PRODUCTS CERTIFIED BY LABORATORIES



This company reserves the right to make any changes in their product without prior notice.

Headquarter / Factories: P.I. Navisur c/ Narciso 5-6 41907, Valencina de la Concepción, Seville. Spain. Phone: (+34) 955 99 77 31

www.accesfloorpolygroup.com

info@afpolygroup.com