



CHARACTERISTICS

Used as common accessory among the raised floor systems, GAMAFLOR stair provides an aesthetic solution for height changes.



- 1 FINISH**
Similar to the one used in the raised floor system
- 2 REAR FASCIA**
High density chipboard of 16mm thickness
- 3 VERTICAL STRUCTURE**
High density chipboard of 20-30mm thickness
- 4 EDGE**
Aluminum edge
- DIMENSIONS**
Under requirement



Example of use



PLACING

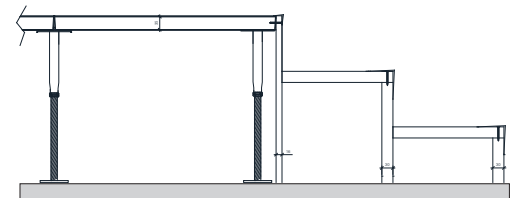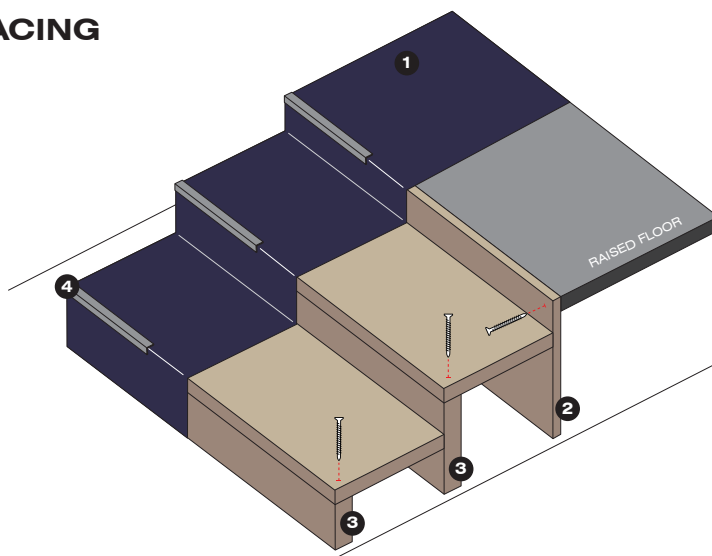

Diagram



FEATURES



LEED CERTIFICATION

Using this floor system accessory contributes positively in obtaining LEED certifications both national and international.



DIMENSIONAL STABILITY

Due to its manufacture materials, GAMAFLOR STAIR guarantees the stability in both high and low temperatures.



REGULATION

This accessory can be easily used in any given space due to its versatility and appearance.



CERTIFICATIONS



This company reserves the right to make any changes in their product without prior notice.

Headquarter / Factories: P.I. Navisur c/ Narciso 5-6 41907, Valencina de la Concepción, Seville. Spain. Phone: (+34) 955 99 77 31

www.accesfloorpolygroup.com

info@afpolygroup.com